

GROUND FLOOR PLAN AT EL +100.000 (FFL) & EL +101.400 (FFL)  
 FOR ELECTRICAL TRENCH & FIRE-WATER TRENCH REFER DRAWING NO. D-6291-CV-170-002

REFERENCE DRAWINGS

SR. NO.	DRAWING NO.	TITLE
1	E-6291-P1-010	OVERALL PLOT PLAN
2	E-6291-CV-160-054	STYRENE BUTADIENE RUBBER PLANT ARCHITECTURAL ROOF PLAN
3	E-6291-CV-160-055	ARCHITECTURAL SECTIONS & ELEVATIONS
4	E-6291-CV-170-051	BOX WAREHOUSE - ARCHITECTURAL GROUND FLOOR PLAN
5	E-6291-CV-170-052	BOX WAREHOUSE - ARCHITECTURAL ROOF PLAN
6	E-6291-CV-170-053	BOX WAREHOUSE - ARCHITECTURAL SECTIONS & ELEVATIONS
7	D-6291-CV-160-066	FINISH SCHEDULE & DOOR SCHEDULE

- NOTES
- ALL DIMENSIONS ARE IN MILLIMETERS & LEVELS, COORDINATES ARE IN METER UNLESS NOTED OTHERWISE.
  - HPP EL +100.000 CORRESPONDS TO RL 238.72
  - ALL DIMENSIONS ARE UNFINISHED DIMENSIONS.
  - ALL EXTERNAL WALLS SHALL BE 230 THK BRICK WALLS.
  - FOR GENERAL ARCHITECTURAL NOTES REFER STD DWG. NO. S222-CI-EB-00023.
  - EXACT LOCATION & SIZE OF ALL CUTOUT IN FLOOR, WALLS FOR DIFFERENT SERVICES SHALL BE AS PER SPECIFIC VENDOR REQUIREMENT AND SHALL BE MARKED DURING DETAIL ENGINEERING.
  - LAYING & FIXING OF FALSE CEILING SHALL COMMENCE AFTER UNDER DECK INSULATION, HANGER HOOK FOR FALSE CEILING, A/C DUCTING, ELECT CONDUITS, SUPPORTING ARRANGEMENT OF LIGHTING FIXTURES ARE INSTALLED IN POSITION.
  - ANTI-TERMITE TREATMENT SHALL BE PROVIDED TO PLINTH AREA OF THE BUILDING AS PER SPECIFICATIONS.
  - 40 THK DAMP-PROOF COURSE (DPC) SHALL BE PROVIDED AT GRADE SLAB LEVEL FOR ALL BRICK WALLS EXCEPT WALLS SUPPORTED ON GRADE SLAB ITSELF OR RC PLINTH BEAM, THE TOP OF WHICH IS AT GRADE SLAB LVL.


LEGEND

FGL - FINISHED GROUND LEVEL	EE - EMERGENCY EXIT
FFL - FINISHED FLOOR LEVEL	VENT - VENTILATION
HPP - HIGH POINT OF PAVING	F/C - FALSE CEILING
TOC - TOP OF CONCRETE	EX - EXHAUST FAN
UNO - UNLESS NOTED OTHERWISE	A/C - AIR-CONDITIONED
UPVC - UNPLASTICIZED POLYVINYL CHLORIDE	TYP - TYPICAL
	D/W - DRINKING WATER

FIRE LEGEND

SYM.	•	PENDENT SPRINKLER
	—	WATER CURTAIN
	—	SPRINKLER BRANCH PIPE
	—	SPRINKLER MAIN HEADER
	✕	BUTTER FLY VALVE
	⊕	FLOW SWITCH
	⊕	DELUGE VALVE

HOLD FOR DIMENSION OF DOOR LEVELER. HOLD RELEASED

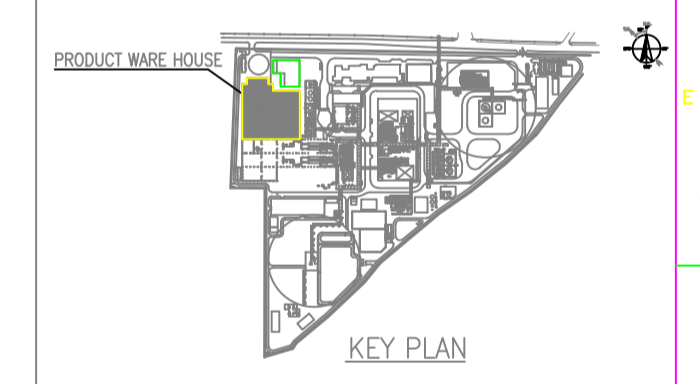

REV	DESCRIPTION	DRN	CHG	CHK	IN	BY	APP	DATE
1								11/10/2022

OWNER : INDIAN SYNTHETIC RUBBER LIMITED  
 PROJECT IMPLEMENTOR : INDIAN OIL CORPORATION LIMITED.  
 LICENSOR : TSRC CORPORATION, TAIWAN  
 CONSULTANT : UHDE INDIA PRIVATE LIMITED  
 PEB VENDOR : PEB STEEL LLOYD (I) LTD. PITHAMPUR

TOYO ENGINEERING INDIA LIMITED  
 MUMBAI - INDIA  
 TEL: 081 2555 5555  
 PROJECT NO: 6291

TITLE : PRODUCT WAREHOUSE ARCHITECTURAL GROUND FLOOR PLAN AT EL+100.000(FFL)&EL+101.400(FFL)  
 SCALE : 1:200  
 DWG. NO. E-6291-CV-160-053

CHKD BY	APP. BY	DATE