


DETECTOR

PENDENT SPRINKLER (OPEN)

ACTIVATION OF DETECTOR
SENDS SIGNAL
BACK TO THE PANEL

HOOTER WILL START AFTER DETECTION

FLOW SWITCH DETAIL

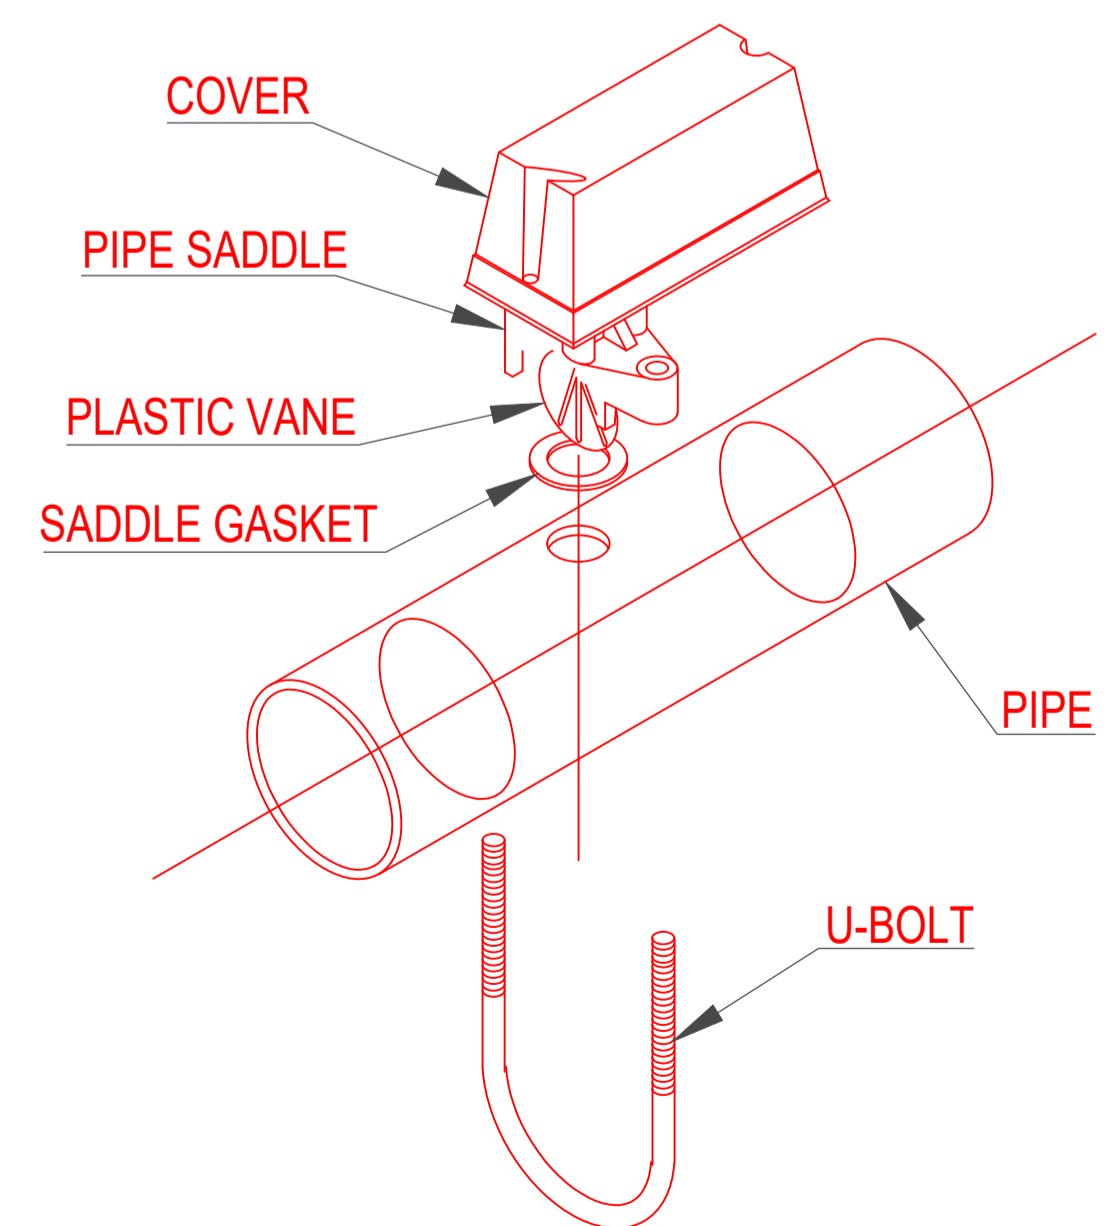

SLD FOR ICV

WATER SUPPLY

